



CK 93 (AKG Blue Line)

- **Consistent hypercardioid polar pattern and good, frequency independent off-axis rejection**
- **Mounts directly on SE 300 B powering unit or connects via 10-ft. (3-m) cable**


Similar to the CK 91, the CK 93 provides greater attenuation of 120° off-axis sounds. In addition to a higher ratio of direct to ambient sound, it also offers a virtually ruler-flat frequency response. Includes foam windscreen.

Specifications

Polar pattern	hypercardioid
Frequency range	20 to 20,000 Hz
Sensitivity	10 mV/Pa (-40 dBV)
Max. SPL	132/142 dB (for 1% THD)
Equivalent noise level (CCIR 468-3)	28 dB
Equivalent noise level	17 dB-A
Signal/noise ratio (A-weighted)	77 dB
Connector	bayonet mount
Finish	dark gray
Net weight	35 g / 1.2 oz.
Shipping weight	200 g / 7.1 oz.
Patent(s)	Electrode support for condenser transducer (Patent no. AT 392.182, DE 4.021.661)



Frequency curve and polar pattern

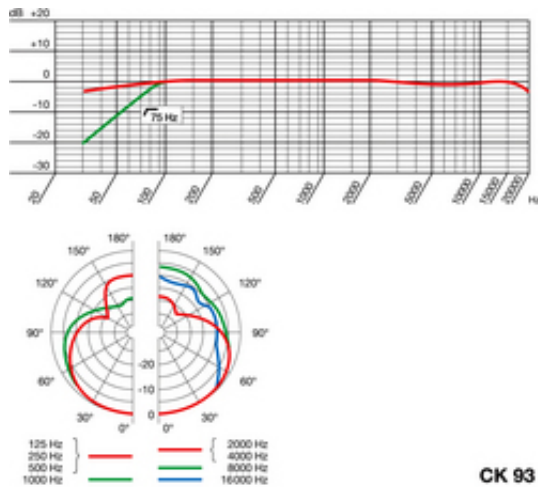

Engineer's specifications

Hypercardioid microphone capsule for the AKG BLUE LINE modular studio condenser microphone system. When attached to the SE 300 B power supply module, the capsule shall perform to the following specifications: Frequency range: 20-20,000 Hz; sensitivity at 1 kHz: 10 mV/Pa; maximum SPL: 132/142 dB SPL for 1 % T.H.D.; equivalent noise level: 17 dB-A. The capsule shall be provided with an extremely rugged bayonet mount for attaching to the SE 300 B power supply module. The case shall be no larger than 19 mm in diameter and 36 mm long. The maximum net weight of the capsule shall be 35 g (1.2.oz.).